



100% WOOD



POSSIBILITY OF PAINTING



HIGH SCRATCHES AND DIRT RESISTANCE



EASY ASSEMBLY WITH CLIPS




DUCTS FOR CABLES



HIGH MOISTURE RESISTANCE

TECHNICAL SPECIFICATION FOR P50 VENEERED SKIRTING BOARD

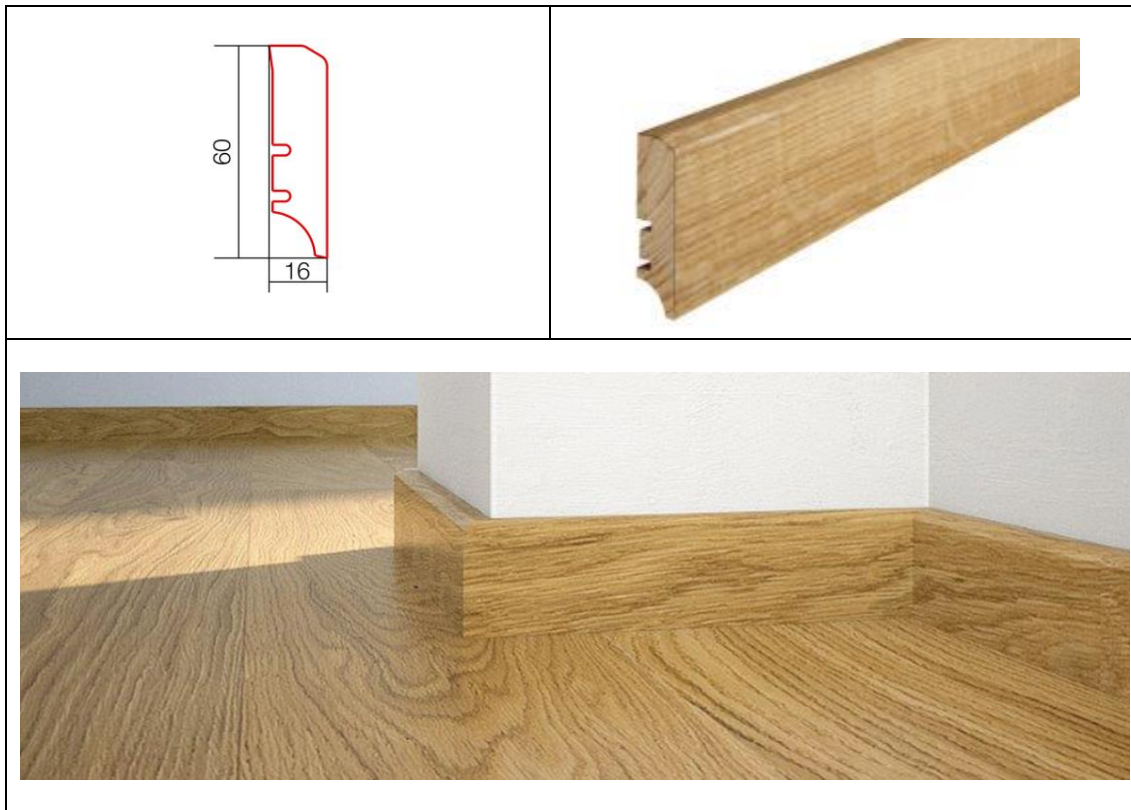


MATERIAL / APPEARANCE

Skirting boards made of 100% wood, covered with veneer on the outside

Skirting board cross-section:

1. Varnish layer
2. Natural hardwood veneer
3. Non-woven layer.
4. Softwood core (pine) without knots.
5. Place for mounting clips.
6. Cable cutout.
7. Dampproof insulation with varnish on the bottom.

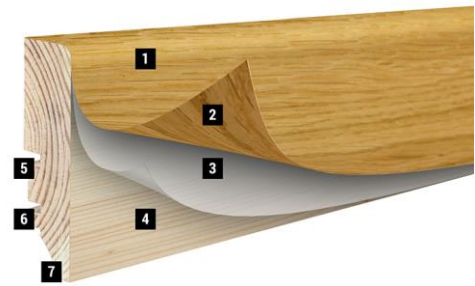

APPLICATION

Skirting boards are made entirely of natural coniferous wood, finger-jointed, which guarantees their extraordinary durability. The decorative surface and the edges of the slats are veneered entirely along the length of the slat. Wooden skirting boards are the best finish for a floor made of Barlinek boards, panels or tiles. They are extremely functional and very dimensionally stable.



100% WOOD



POSSIBILITY OF PAINTING



HIGH SCRATCHES AND CHIP RESISTANCE


















EASY ASSEMBLY WITH CLIPS



DUCTS FOR CABLES



HIGH MOISTURE RESISTANCE

COLOUR OF THE SURFACE LAYER			
Index/EAN code/ catalogue number	Illustrative photo of the color of the skirting board*	Index/EAN code/ catalogue number	Illustrative photo of the color of the skirting board*
Index: LIS-DBE-ANT-220-060-P50 Catalogue no: P5001051A EAN code: 5906737933206		Index: LIS-DBE-OLB-220-060-P50 Catalogue no: P5001041A EAN code: 5906737933176	
Index: LIS-DBE-BI2-220-060-P50 Catalogue no: P5001332A EAN code: 5906737942567		Index: LIS-DBE-POP-220-060-P50 Catalogue no: P5001242A EAN code: 5906737942536	
Index: LIS-DBE-BI4-220-060-P50 Catalogue no: P5001352A EAN code: 5906737942574		Index: LIS-DBE-TER-220-060-P50 Catalogue no: P5001212A EAN code: 5906737942758	
Index: LIS-DBE-BRG-220-060-P50 Catalogue no: P5001302A EAN code: 5906737942246		Index: LIS-JES-LAK-220-060-P50 Catalogue no: P5002011A EAN code: 5906737924716	
Index: LIS-DBE-CR2-220-060-P50 Catalogue no: P5001312A EAN code: 5906737942550		Index: LIS-JES-LB5-220-060-P50 Catalogue no: P5002031A EAN code: 5906737924570	
Index: LIS-DBE-ESS-220-060-P50 Catalogue no: P5001022A EAN code: 5906737930489		Index: LIS-TAL-LAK-220-060-P50 Catalogue no: P5008012A EAN code: 5906737924600	
Index: LIS-DBE-LAK-220-060-P50 Catalogue no: P5001011A EAN code: 5906737924563		Index: LIS-DBE-SUR-220-060-P50 Catalogue no: P5001121A EAN code: 5906737927960	
Index: LIS-DBE-LB5-220-060-P50 Catalogue no: P5001031A EAN code: 5906737924594			

CHARACTERISTICS/ INSTALLATIONS	
The humidity of the skirting board:	9% +/-2%
Assembly:	We recommend the use of "Barlclips" mounting clip. A detailed mounting instructions of skirting boards can be found on www.Barlinek.com and in the mounting instructions of Barlinek's floorboards.
Intended use:	Rooms inside buildings with a relative air humidity of 45% to 60%
Permissible bend deflection of a skirting board:	22 mm/ 2200mm of the length
Blue stain of pine wood	Permissible, up to 50% of the wood surface



100% WOOD



POSSIBILITY OF PAINTING



HIGH SCRATCHES AND DIRT RESISTANCE



EASY ASSEMBLY WITH CLIPS



DUCTS FOR CABLES



HIGH MOISTURE RESISTANCE

THE DIMENSIONS OF AN INDIVIDUAL ELEMENT

Length:	2200mm Due to the lack of impact of this parameter on the mounting: Applicable tolerances are the following: <ul style="list-style-type: none"> • one skirting board in a package can have a +/- 10mm length variation • two skirting boards in a package can have a +/-5mm length variation
Width:	16mm (+/-0.5mm)
Height:	60mm (+/-0.5mm)

PACKAGE / WEIGHT

The weight of one skirting board	0,946 kg
The number of skirting boards in the package:	10pcs. = 22m
The weight of one package:	8,32 kg
Number of packages per pallet:	78 packages.
Pallet weight (skirting boards + a pallet):	775,68 kg
The dimensions of one pallet (H/W/L)	1320mm x 830mm x 2200mm

DESCRIPTION OF THE SURFACE LAYER

Healthy knots	Acceptable up to 10 mm in diameter
Colour scheme of surface layer	Any, varied
Silver grains (only for oak)	Acceptable , without limit
Sapwood (only for oak)	Acceptable (only for oak in color) Unacceptable (only for transparent oak)
Arrangement of fibres	Varied
Veener joints	Max. 3 veneer joints of a similar colour on one skirting board. Acceptable 1 skirting board with a visible joint

**NOTE: Skirtings boards are produced exclusively from genuine wood. Because of the natural variation in the raw material, the individual skirtings boards and their surface may differ in color, shade, the intensity of knots and grain pattern. Sample boards, samples, photo- graphs and merchandising brochures may not fully correspond to the actual appearance of the products. The color of the product delivered may be different from the material available at the point of sale.*

Prepared – 29.05.2023